




MIKO ENERGY



HYDRAULIC MODULE

With Water Tank

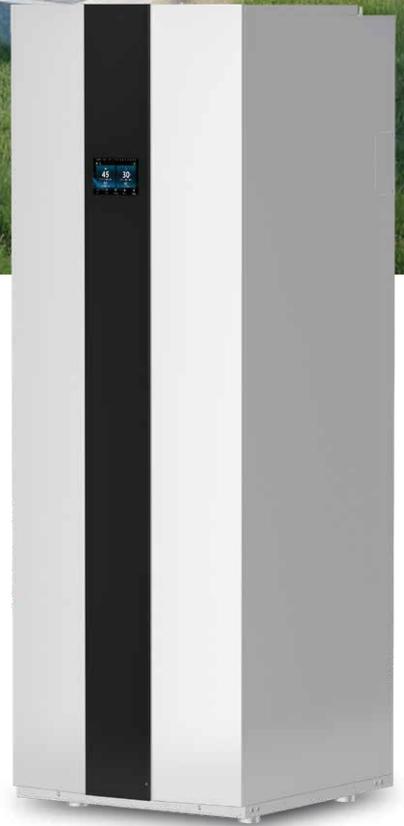

TECHNICAL SPECS

MODEL		HUST-200LA1	HUST-200LA3	HUST-250LA1	HUST-250LA3
Power Supply		220-240/1/50	380-415/3/50	220-240/1/50	380-415/3/50
Auxiliary heater power	kW	3	9	3	9
Power Input Max.	kW	3.5	9.5	3.5	9.5
Current Input Max.	At	15.6	16.2	15.6	16.2
Hot Water Tank Volume	L	200	200	250	250
Electrical Shockproof	/	I	I	I	I
IP Class	/	IPX1	IPX1	IPX1	IPX1
Hot Water Piping Connections	In	G3/4	G3/4	G3/4	G3/4
Heating Water Piping Connections	In	G1	G1	G1	G1
Water Pressure Drop	kPa	10	10	10	10
Water Pressure Min/Max	MPa	0.1 / 0.3	0.1 / 0.3	0.1 / 0.3	0.1 / 0.3
Hot Water Tank Pressure Max.	MPa	0.8	0.8	0.8	0.8
Sound Pressure level	dB(A)	35	35	35	35
Heat Exchange Coil Shape	/	corrugation	corrugation	corrugation	corrugation
Heat Exchange Coil Dimensions	mm	□ 28*25000	□ 28*25000	□ 28*25000	□ 28*25000
Net Weight	kg	95	95	120	120
Gross Weight	kg	105	105	130	130

* Please refer to the nameplate for product upgrades or changes in specifications without prior notice.

- Energy class: A+++
- Quick installation
- Reduced space requirements
- Environmentally friendly refrigerant
- Higher water temperature output up to 75°C
- WIFI smart control
- Choose from 200L or 250L tank options
- Perfect for R290/R32 Monoblock Heat Pump Solution

